

LDC6-210-GC2 BCI Group GC2



Features & Benefits

- True deep cycle AGM technology - GREEN SOLUTION
- Over 99.99% virgin lead for grid plate and active material
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Double separator configuration: long cycle life &
- High energy density and super anti-vibration design
- Low self-discharge for longer shelf life

Electrical Specifications


Voltage	Capacity (AH)					Reserve Capacity (Min)		
	100HR	20HR	10HR	5HR	3HR	@25A	@56A	@75A
6	231	210	200	175	165	460	175	120

Physical Specifications

Model	Dimensions (mm/inches)				Weight (kg/lbs)	Terminal Type (Standart)	Case Material
	Length	Width	Height	Total Height			
LDCG-210-GC2	260 (10.24)	180 (7.09)	252 (9.92)	274 (10.79)	27.2 (59.95)	DT-5/16	PP

Operating Temperature Range		
Discharge	Charge	Storage
-15°C~50°C (5°F~122°F)	0°C~40°C (32°F~104°F)	-15°C~40°C (5°F~104°F)


Dimensions

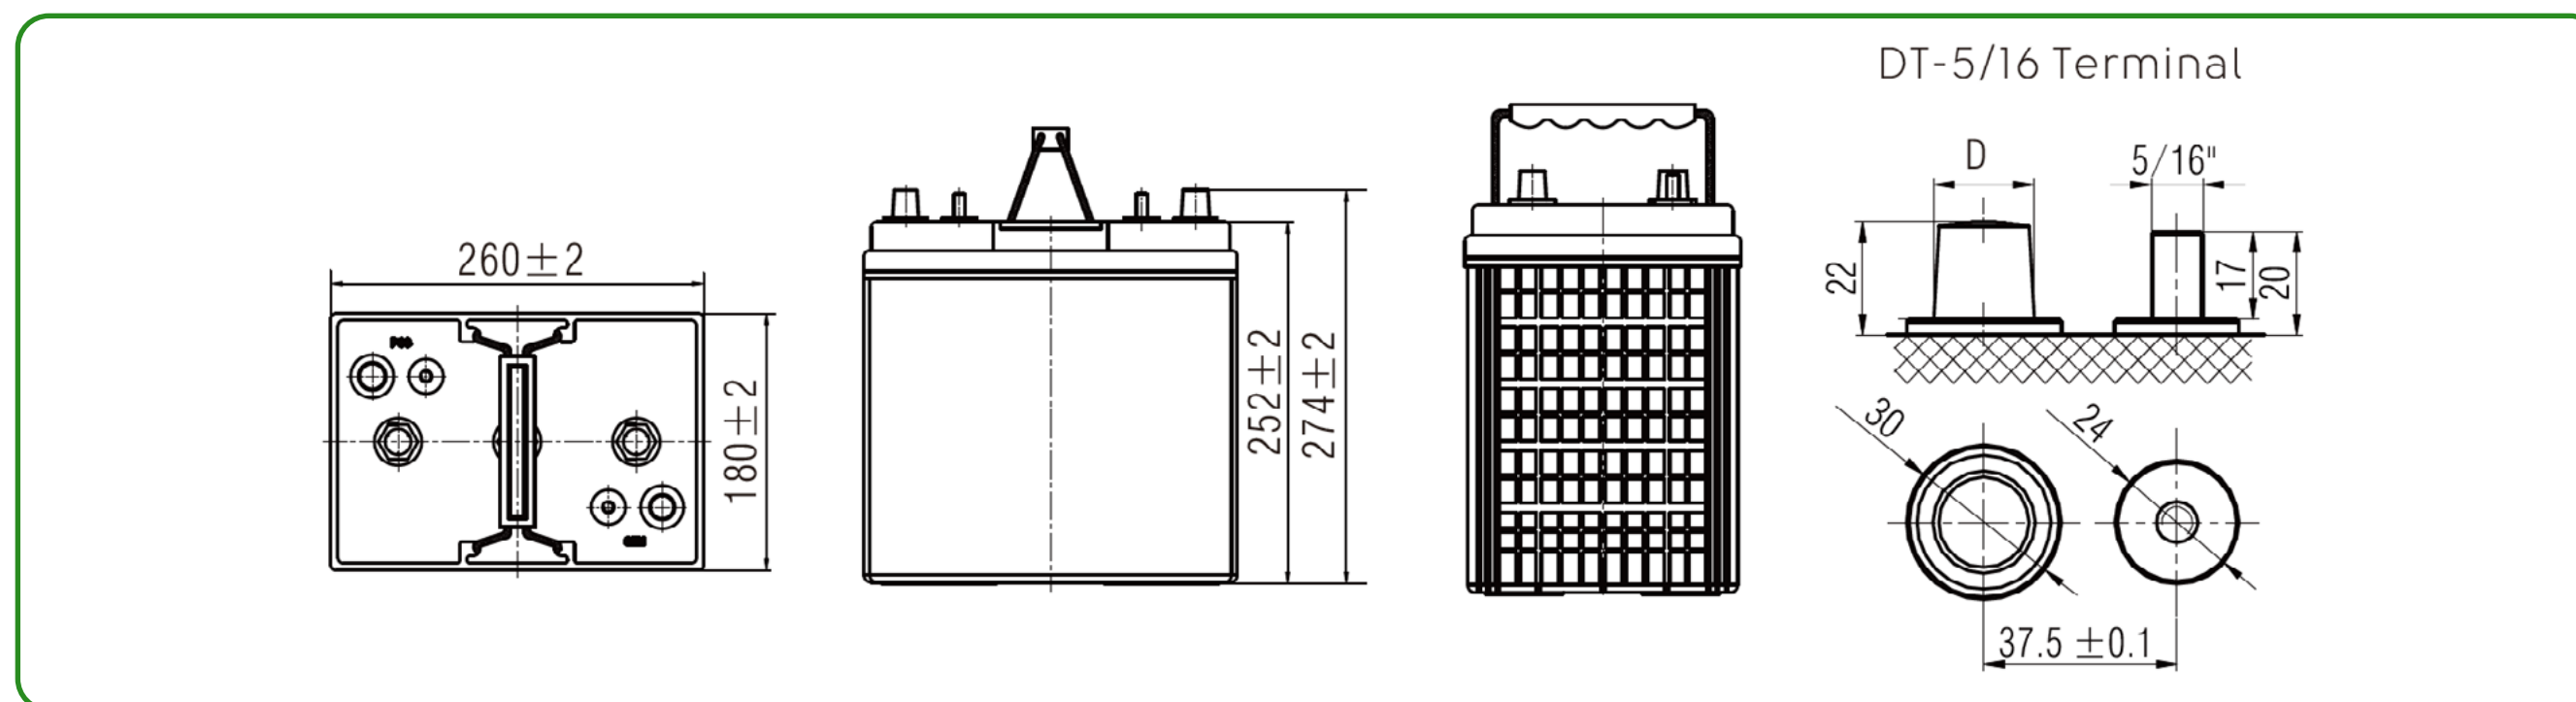


Note: D: Positive $19.5_{-0.3}^0$, D: Negative $17.9_{-0.3}^0$; Terminal Torque Values in -lb(Nm): 176-203(20-23)

Performance Characteristics


LEOCH LDC AGM Charging Profile

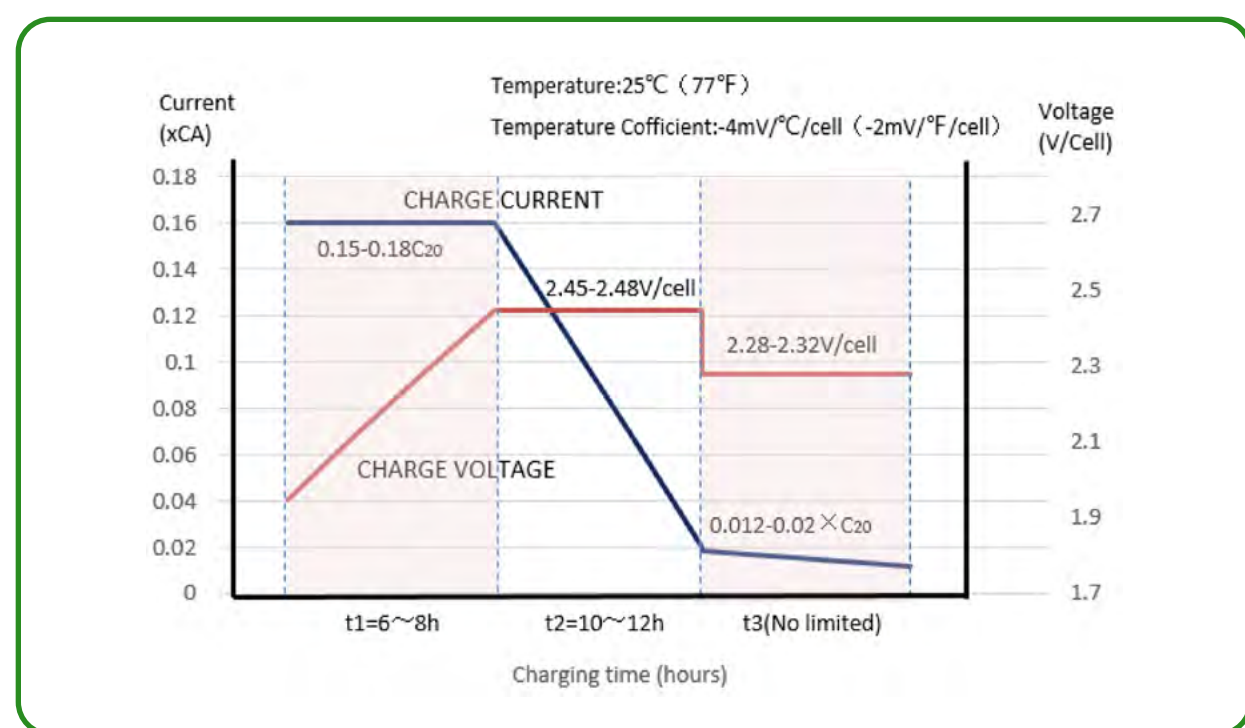


Relationship of OCV and State Of Charge (25°C, 77°F)

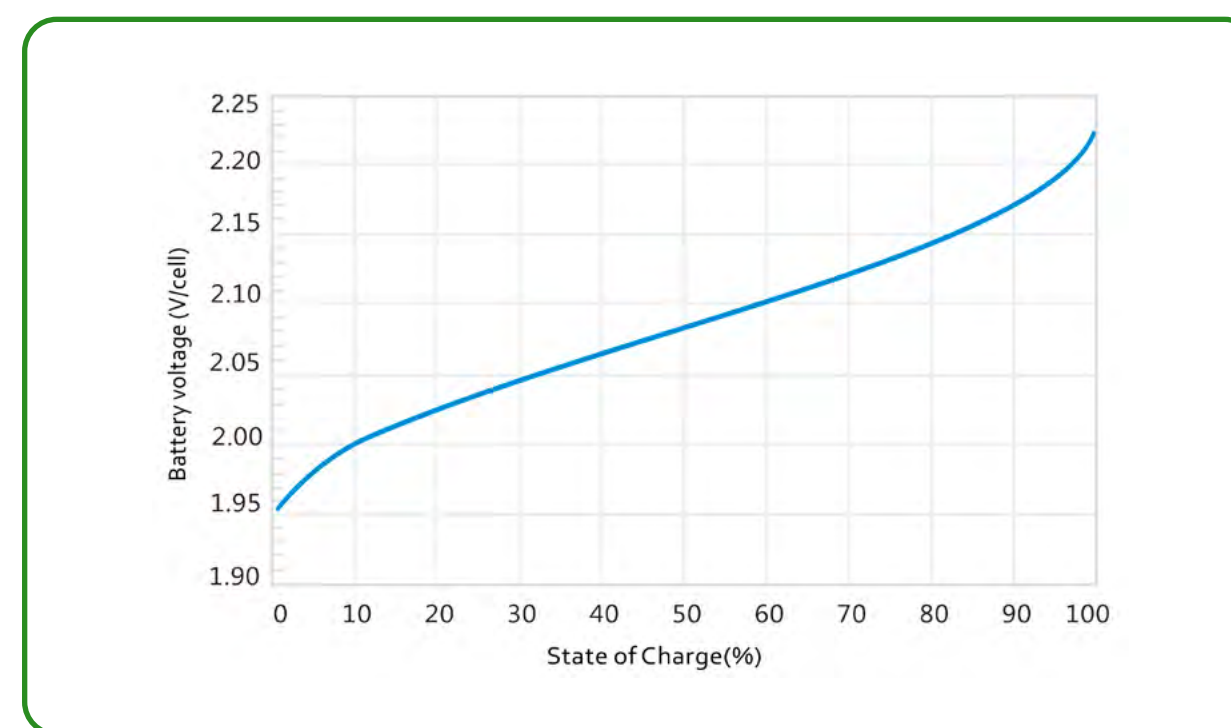

Cycle life in relation to Depth Of Discharge

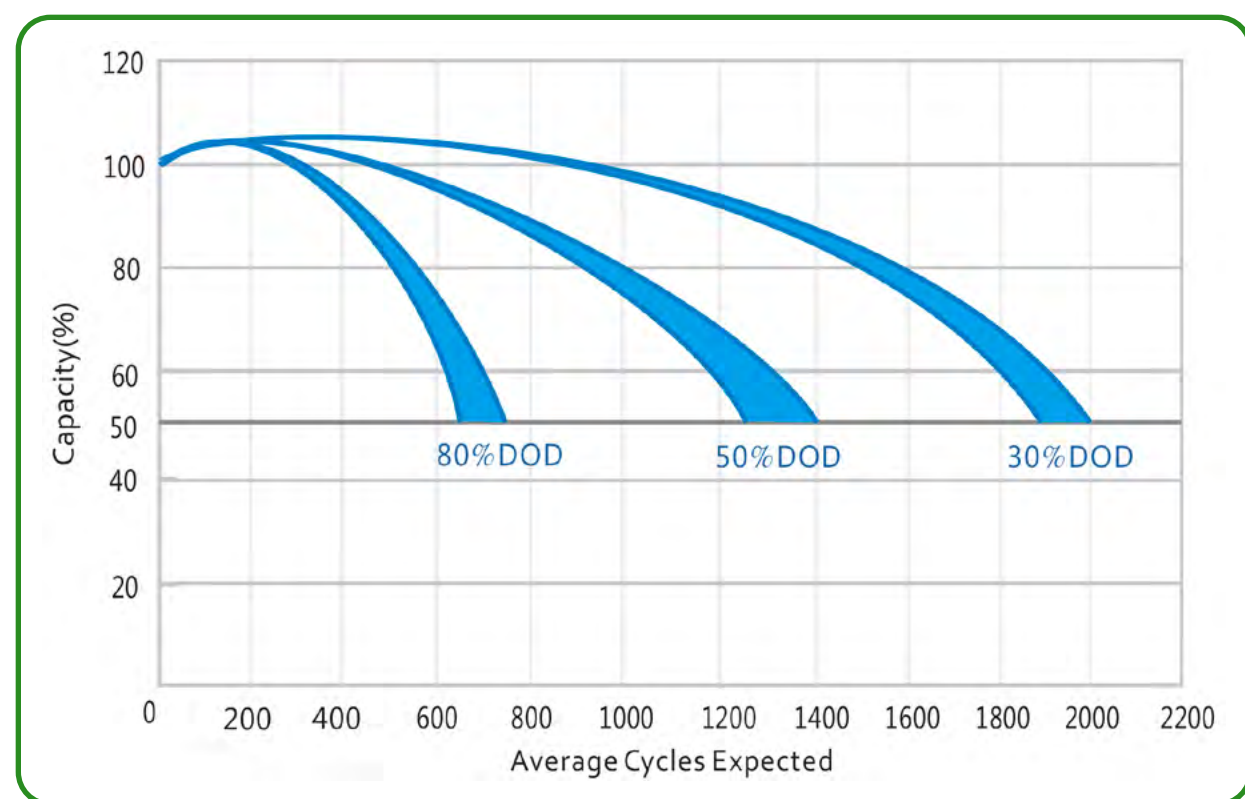

Self-discharge Characteristic

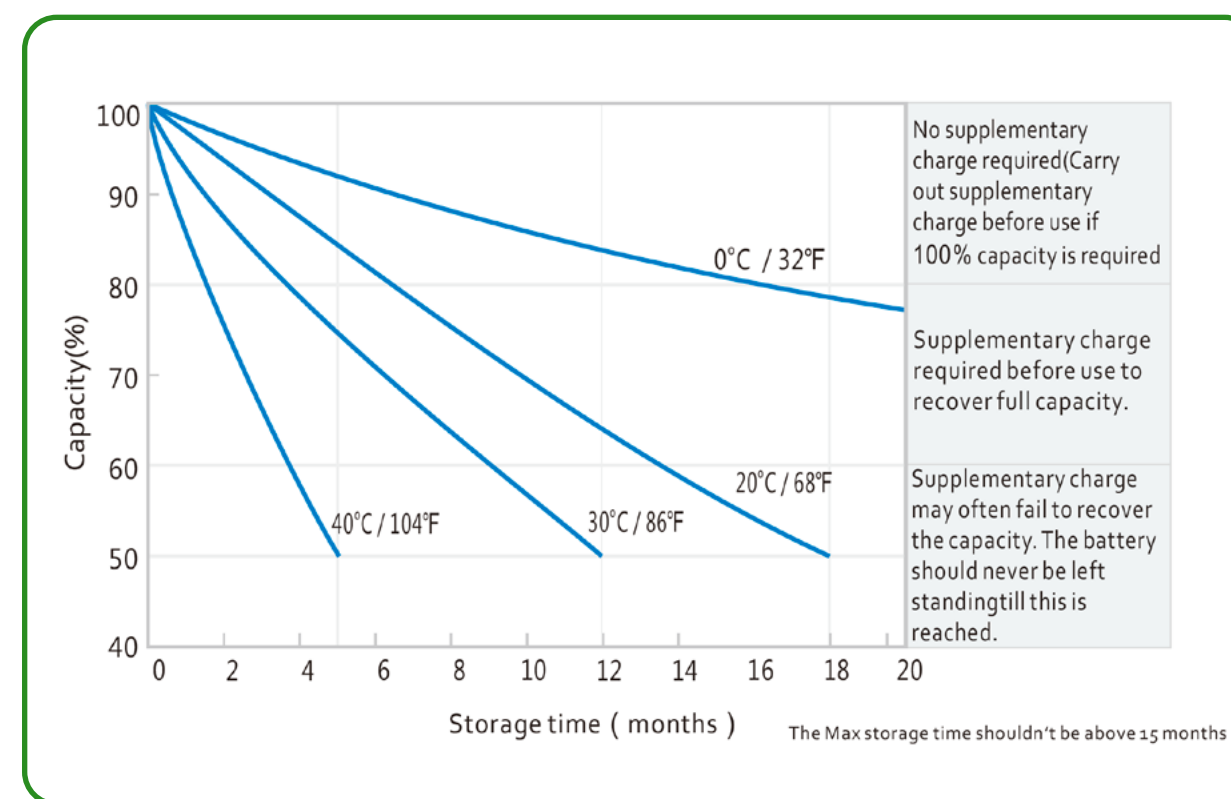

LEOCH INTERNATIONAL SALES OFFICE:
Add: 5th Floor, Xinbaohui Bldg.
Nanhai Blvd, Nanshan, Shenzhen, China.
518054
Tel: +86-755-86036060(100 lines)

Fax: +86-755-26067269
E-mail: export@leoch.com
web: www.leoch.com
© 2018 LEOCH. All rights reserved.

Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted. Subject to revisions without prior notice.
Publication No: LB-LDC-PD-EN-V1.0-201807