


i40F Specs

- **Weight:** 1378 lbs.
- **Capacity:** 4 People
- **Overall Dimensions LxWxH:** 122inx49inx75in
- **Colors:** Alpine White Metallic, Champagne Metallic, Tuscan Yellow, Tangerine Orange, Torch Red, Sangria Red Metallic, Purple Metallic, Indigo Blue Metallic, Caribbean Blue, Forest Green Metallic, Lime Green, Raven Black Metallic

Body Configuration

- **Windshield:** Foldable Acrylic/Optional DOT Acrylic
- **Roof:** Innovative air deflecting design with full high-strength aluminum frame
- **Body:** Injection Molded Thermoplastic that is both stylish and resilient to outside damage
- **Mirrors:** Fully Adjustable and Foldable
- **Floor:** High-Density Polyethylene molded for extra strength and toughness with Rubber Floor Mat
- **Wheels:** 10 or 12 Inch Machined Face Aluminum with Powder Coated Accents
- **Tires:** 205/50R10 6 Ply Nylon Cord or 215/35R12 4 Ply Nylon Cord
- **Front Suspension:** Macpherson Style Fully Independent Coil Over Shock with Camber Adjustment.
- **Rear Suspension:** Solid Axle Coil Over Shock and Stabilizing Bar
- **Drivetrain:** 10.5:1 or 14:1 High Speed Rear Axle
- **Chassis:** Tubular Powder Coated Steel Frame
- **Instrumentation:** Fully Integrated Digital Instrument Cluster
- **Lighting and Signals:** Single Combination Switch for LED Projector Hi & Lo Beam Headlights, LED Signal Lights, Taillights, and Horn
- **Safety Restraint:** Side Hip Restraint & Retractable Seat Belts
- **Braking System:** Four Wheel Disk Brakes and Electromagnetic Parking Brake System
- **Steering:** Self-Adjusting Double-Ended Rack and Pinion
- **Dash Components:** Forward/Neutral/Reverse Switch, USB and 12V Plugs, Cubby Storage, Multiple Cup Holders, Key Switch, Instrumentation Cluster
- **Seats:** Marine Grade Vinyl, Custom Stitched Panel, Single Color, Color Matched with White or Black Accents.

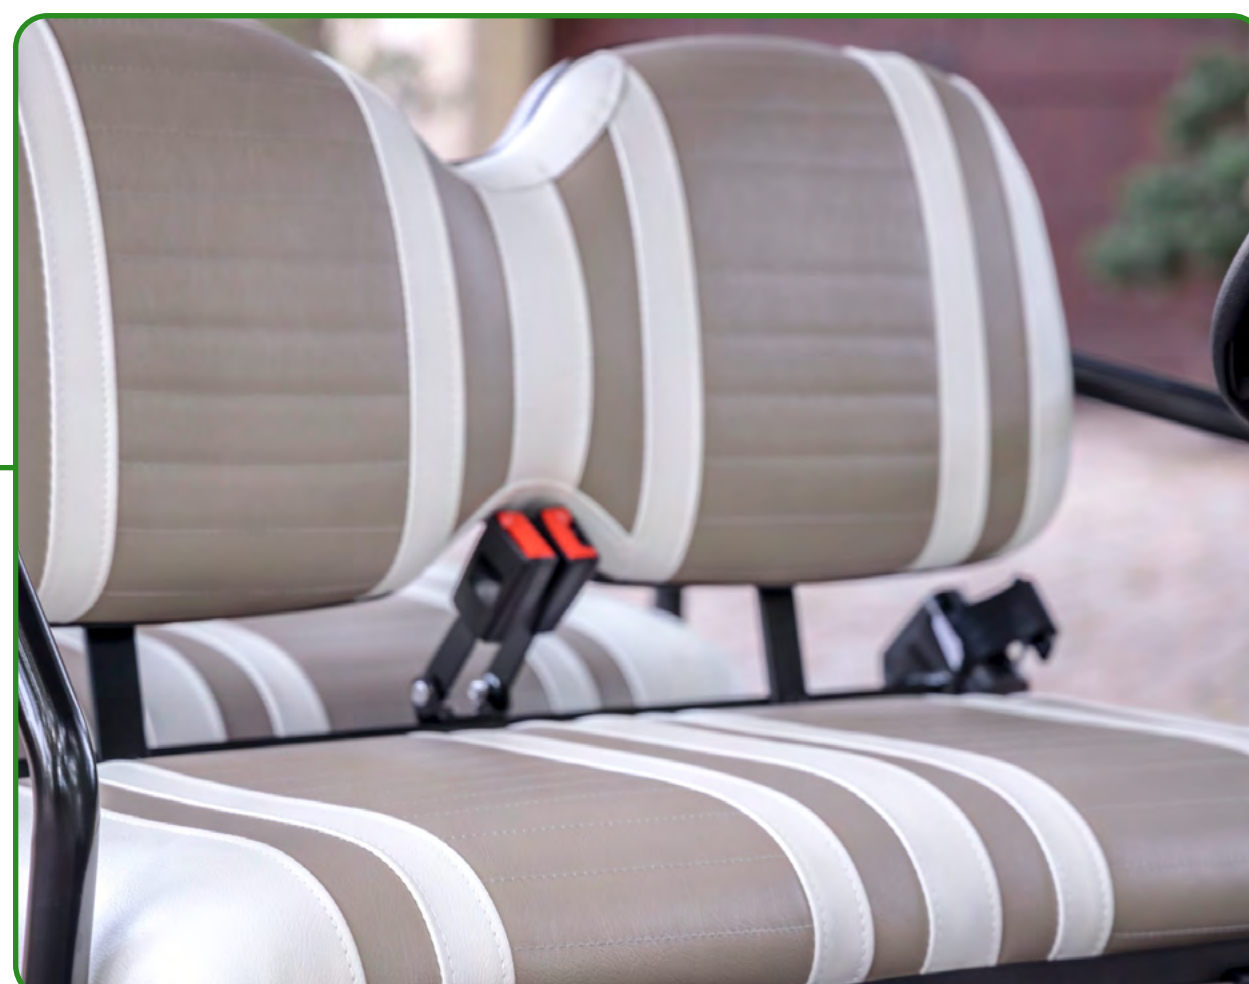

Electrical Systems

- **Controller:** 450A ICON Controller
- **Motor:** 48V ICON 5KW 3 Phase High Torque Motor
- **Charger:** ICON 48V On-Board Charging System with Body Mounted Charge Indicator
- **Batteries:** (6) 8 Volt Sealed Maintenance-Free AGM